


RECOMMENDED MOUNTING HOLE  
 MAXIMUM PANEL THICKNESS: 5.5 MM  
 RECOMMENDED MOUNTING TORQUE:  
 12 INCH-POUNDS MAX

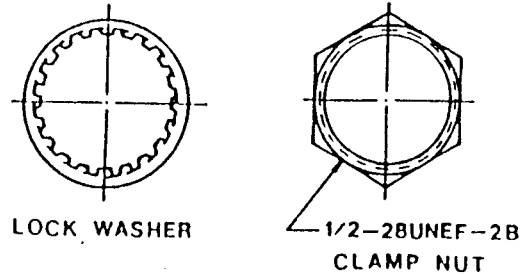

MATERIAL & FINISH

- ① CENTER CONTACT : PHOSPHOR BRONZE, GOLD PLATING
- ② BODY : DIECAST (ZINC #3), NICKEL PLATING
- ③ HOUSING : PBT (94 V-0)
- ④ INSULATOR : POLYPROPYLENE (94 V-0)
- ⑤ MOUNTING POST : BRASS, TIN/LEAD PLATING
- ⑥ SOLDER TAIL : STEEL WIRE, COVERED WITH COPPER, TIN LEAD PLATING
- ⑦ WASHER : PHOSPHOR BRONZE, NICKEL PLATING
- ⑧ NUT : BRASS, NICKEL PLATING