


### Surface Mount Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system.

- \* Low Forward Voltag.
- \* Low Switching noise.
- \* High Current Capacity
- \* Guarantee Reverse Avalance.
- \* Guard-Ring for Stress Protection.
- \* Low Power Loss & High efficiency.
- \* 125 °C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

#### SCHOTTKY BARRIER RECTIFIERS


**3.0 AMPERES  
20-60 VOLTS**



**DO-214AA(SMB)**

#### MAXIMUM RATINGS

| Characteristic   | Symbol                          | SR32          | SR30 | SR34 | SR35 | SR36 | Unit |
|--|---------------------------------|---------------|------|------|------|------|------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                         | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 20            | 30   | 40   | 50   | 60   | V    |
| RMS Reverse Voltage  | $V_{R(RMS)}$                    | 14            | 21   | 28   | 35   | 42   | V    |
| Average Rectifier Forward Current  | $I_o$                           | 3.0           |      |      |      |      | A    |
| Non-Repetitive Peak Surge Current<br>( Surge applied at rate load conditions<br>halfware, single phase, 60Hz ) | $I_{FSM}$                       | 75            |      |      |      |      | A    |
| Operating and Storage Junction<br>Temperature Range  | $T_J, T_{stg}$                  | - 65 to + 125 |      |      |      |      | °C   |



| DIM | MILLMETERS |      |
|-----|------------|------|
|     | MIN        | MAX  |
| A   | 3.30       | 3.90 |
| B   | 4.20       | 4.60 |
| C   | 1.80       | 2.20 |
| D   | 4.90       | 5.60 |
| E   | 1.90       | 2.50 |
| F   | ---        | 1.30 |
| G   | ---        | 0.22 |
| H   | 0.85       | 1.45 |

#### ELECTRICAL CHARACTERISTICS

| Characteristic  | Symbol | SR32 | SR33           | SR34      | SR35           | SR36 | Unit |
|---|--------|------|----------------|-----------|----------------|------|------|
| Maximum Instantaneous Forward<br>Voltage<br>( $I_F=3.0$ Amp )<br>( $I_F=9.0$ Amp )                                      | $V_F$  |      | 0.550<br>0.850 |           | 0.650<br>0.950 |      | V    |
| Maximum Instantaneous Reverse<br>Current<br>( Rated DC Voltage, $T_C = 25$ °C )<br>( Rated DC Voltage, $T_C = 100$ °C ) | $I_R$  |      |                | 3.0<br>50 |                |      | mA   |
| Typical Junction Capacitance<br>( Reverse Voltage of 4 volts & f=1 MHz)   | $C_P$  |      | 210            |           | 190            |      | pF   |

CASE---  
Transfer molded  
plastic

POLARITY---  
Cathode indicated  
polarity band

# SR32 Thru SR34

FIG-1 FORWARD CURRENT DERATING CURVE

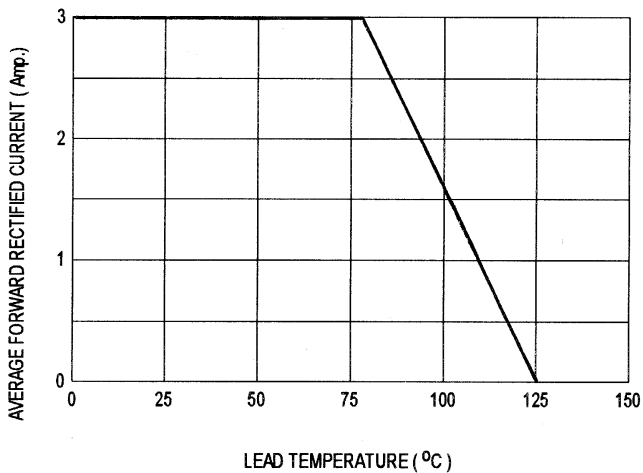


FIG-2 TYPICAL FORWARD CHARACTERISTICS

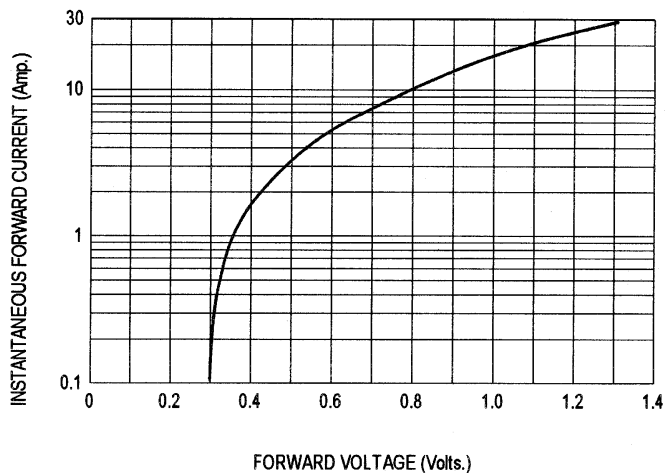


FIG-3 TYPICAL REVERSE CHARACTERISTICS

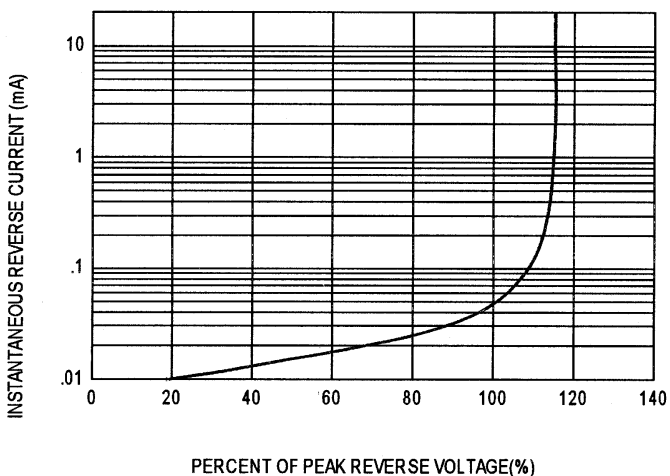


FIG-4 TYPICAL JUNCTION CAPACITANCE

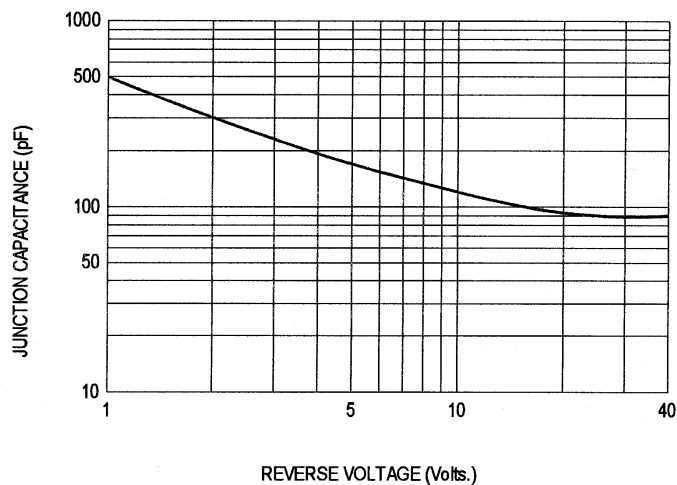


FIG-5 PEAK FORWARD SURGE CURRENT

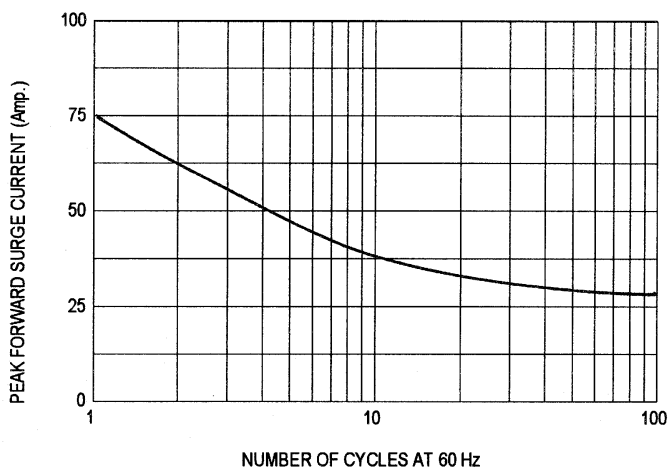


FIG-1 FORWARD CURRENT DERATING CURVE

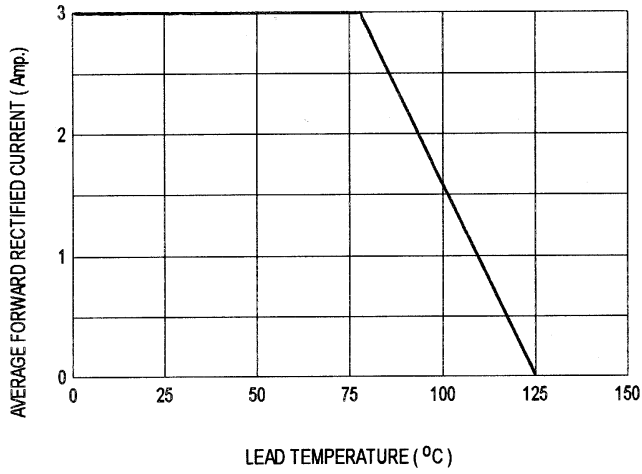


FIG-2 TYPICAL FORWARD CHARACTERISTICS

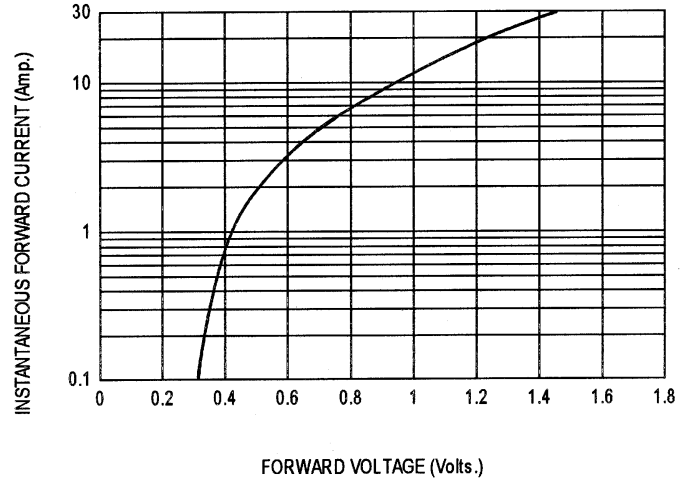


FIG-3 TYPICAL REVERSE CHARACTERISTICS

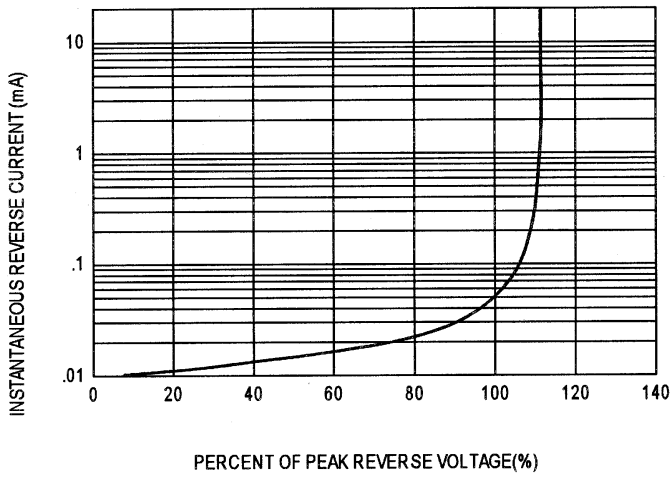


FIG-4 TYPICAL JUNCTION CAPACITANCE

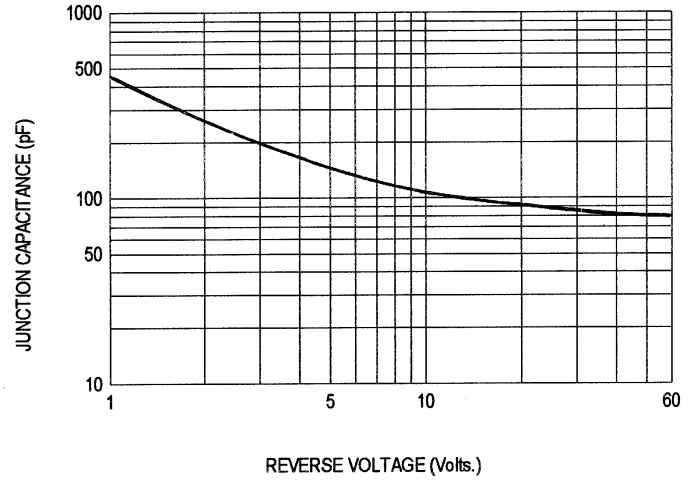


FIG-5 PEAK FORWARD SURGE CURRENT

